

# FT-12S5-JDNN-XM

---



OptiTip Compatible connector Jack-6\*Clipped DLC, Fiber Trunk, 6 branches to WDM/Box

HELIAX® Discrete Fiber Trunk, outdoor rated, single mode fiber cable assembly, End 1: OptiTip Compatible connector (Jack) and End 2: Clipped Duplex LC. End 1 OptiTip Compatible connector (Jack) connector to OptiTip Compatible connector Jumper; End 2 Clipped LC with 5.0mm branch tube for WDM entry sealing and cable divider designed to maintain retention force, clipped LC allow to separate to Duplex LC and terminated on 2.0mm Spiral metal tube for best protection and bending flexibility inside of WDM box. End 2 Branch cable length: 1.5m. Pulling sock is needed for Trunk OptiTip Compatible connector end.

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Product Type</b>	Wireless Fiber Cable Assemblies
<b>Product Series</b>	FT
<b>Ordering Note</b>	ANDREW® non-standard product

## General Specifications


<b>Construction Type</b>	Discrete fiber trunk
<b>Interface, Connector A</b>	OptiTip compatible
<b>Interface Body Style, connector A</b>	Straight
<b>Interface, Connector B</b>	LC/UPC
<b>Interface Feature, connector B</b>	Clippable
<b>Interface Body Style, connector B</b>	Straight
<b>Jacket Color</b>	Black
<b>Total Fibers, quantity</b>	12

## Dimensions

<b>Cable Assembly Length Range (m)</b>	5 – 150
<b>Diameter Over Jacket</b>	5.4 mm   0.213 in

## Ordering Tree

# FT-12S5-JDNN-XM

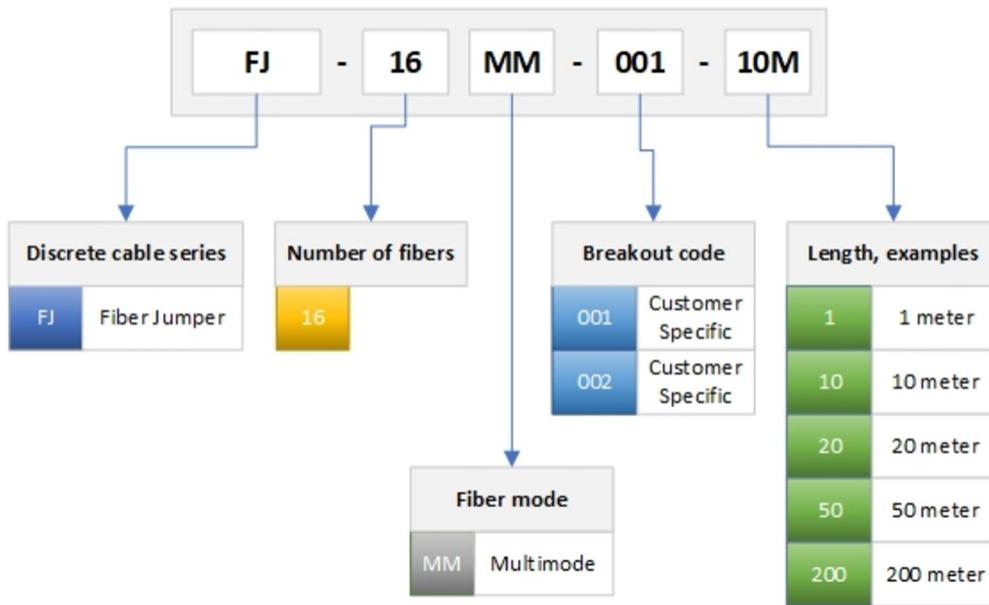

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	108 mm   4.252 in
<b>Minimum Bend Radius, unloaded</b>	54 mm   2.126 in

## Optical Specifications

<b>Fiber Mode</b>	Singlemode
<b>Fiber Type</b>	G.657.A2
<b>Insertion Loss, typical note</b>	Insertion loss is measured at 1310 and 1550 nm
<b>Insertion Loss, typical</b>	0.5
<b>Return Loss, minimum, connector A</b>	50 dB
<b>Return Loss, minimum, connector B</b>	60 dB

## Environmental Specifications

<b>Installation temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Environmental Space</b>	Indoor   Outdoor

## Packaging and Weights

<b>Cable weight</b>	72 kg/km   48.382 lb/kft
---------------------	--------------------------

# FT-12S5-JDNN-XM

---

\* Footnotes

**Insertion Loss, typical note** Insertion loss is measured at a room temp of +20°C (+68°F)