


# S4-90T-F-V2

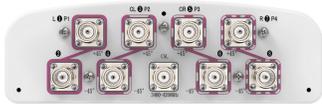

## 8-port Planar Array Antenna, 3400–4200 MHz, 90° HPBW

- Planar array antenna – 4 columns
- Designed for beamforming, includes calibration port
- Optimized for software defined split six sector applications
- Compact form factor with reduced size and weight

## General Specifications


<b>Antenna Type</b>	Sector
<b>Band</b>	Single band
<b>Calibration Connector Interface</b>	4.3-10 Female
<b>Calibration Connector Quantity</b>	1
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	ASA
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	8
<b>RF Connector Quantity, mid band</b>	0
<b>RF Connector Quantity, low band</b>	0
<b>RF Connector Quantity, total</b>	8

## Dimensions

<b>Width</b>	280 mm   11.024 in
<b>Depth</b>	85 mm   3.346 in
<b>Length</b>	400 mm   15.748 in
<b>Net Weight, without mounting kit</b>	4 kg   8.818 lb

## Array Layout


# S4-90T-F-V2

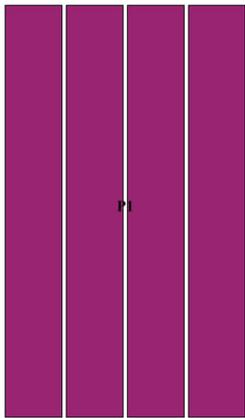

Array ID	Frequency (MHz)	RF Connector	RET (N/A)	AISG RET UID
P1	3400-4200	1 - 8	N/A	N/A

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

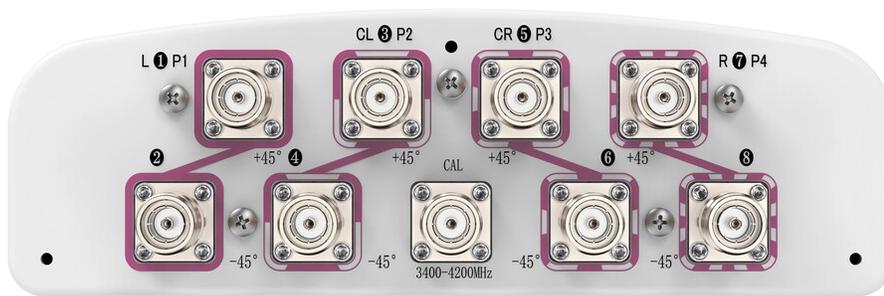

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	3400 – 4200 MHz
<b>Polarization</b>	$\pm 45^\circ$
<b>Total Input Power, maximum</b>	400 W

## Electrical Specifications

Frequency Band, MHz	3400–3600	3600–3800	3800–4200
<b>Gain, dBi</b>	12.5	12.7	12.9
<b>Beamwidth, Horizontal, degrees</b>	108	102	90

# S4-90T-F-V2

Beamwidth, Vertical, degrees	15.4	14.7	14.1
Beam Tilt, degrees	6	6	6
USLS (First Lobe), dB	14	16	17
Coupling level, Amp, Antenna port to Cal port, dB	26	26	26
Coupling level, max Amp $\Delta$ , Antenna port to Cal port, dB	$\pm 2$	$\pm 2$	$\pm 2$
Coupler, max Amp $\Delta$ , Antenna port to Cal port, dB	0.9	0.9	0.9
Coupler, max Phase $\Delta$ , Antenna port to Cal port, degrees	7	7	7
Isolation, Cross Polarization, dB	25	25	25
Isolation, Inter-band, dB	25	25	25
Isolation, Cross Polarization, port to port, dB	25	25	25
Isolation, Cross Polarization, port to port, between two columns, dB	25	25	25
Isolation, Co-polarization, port to port, dB	19	19	19
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-145	-145	-145
Input Power per Port, maximum, watts	150	150	150

## Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3400–3600	3600–3800	3800–4200
Gain, dBi	14	14.5	14.9
Beamwidth, Horizontal, degrees	65	64	61
Beamwidth, Horizontal Tolerance, degrees	$\pm 6.7$	$\pm 6.6$	$\pm 5.2$
Beamwidth, Vertical, degrees	14.8	13.9	12.9
USLS (First Lobe), dB	14	13	16

## Electrical Specifications, Service Beam

Frequency Band, MHz	3400–3600	3600–3800	3800–4200
Steered 0° Gain, dBi	18.2	18.8	19.2
Steered 0° Beamwidth, Horizontal, degrees	26	24	22
Steered 0° CPR at Beampeak, dB	20	18	19
Steered 0° CPR over 10 dB Beamwidth, dB	25.8	24.1	22.2
Steered 0° Front-to-Back Total Power at 180° $\pm$ 30°, dB	32	30	27
Steered 0° Horizontal Sidelobe, dB	13	13	13
Steered 13° CPR at Beampeak, dB	32	30	27

# S4-90T-F-V2

<b>Steered 13° CPR over 10 dB Beamwidth, dB</b>	13	13	13
<b>Steered 30° Gain, dBi</b>	17.4	17.8	18.2
<b>Steered 30° CPR at Beampeak, dB</b>	20	18	20

## Electrical Specifications, Single Column

<b>Frequency Band, MHz</b>	<b>3400–3600</b>	<b>3600–3800</b>	<b>3800–4200</b>
<b>Gain, dBi</b>	13	13.6	13.9
<b>Beamwidth, Horizontal, degrees</b>	96	89	81
<b>Beamwidth, Horizontal Tolerance, degrees</b>	±8	±5	±8
<b>Beamwidth, Vertical, degrees</b>	14.9	14.1	13.1
<b>CPR at Sector, dB</b>	11	11	10
<b>USLS (First Lobe), dB</b>	14	14	16
<b>Input Power per Port, maximum, watts</b>	100	100	100

## Electrical Specifications, Soft Split

<b>Frequency Band, MHz</b>	<b>3400–3600</b>	<b>3600–3800</b>	<b>3800–4200</b>
<b>Gain, dBi</b>	17.3	17.8	18.2
<b>Beamwidth, Horizontal, degrees</b>	32	30	27
<b>CPR at Beampeak, dB</b>	21	18	20
<b>Front-to-Back Total Power at 180° ± 30°, dB</b>	30	29	27
<b>Horizontal Sidelobe, dB</b>	19	18	16

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	86.0 N @ 150 km/h (19.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	27.0 N @ 150 km/h (6.1 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	107.0 N @ 150 km/h (24.1 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	388 mm   15.276 in
<b>Depth, packed</b>	189 mm   7.441 in
<b>Length, packed</b>	629 mm   24.764 in
<b>Weight, gross</b>	8.3 kg   18.298 lb
<b>Weight, net</b>	4 kg   8.818 lb

## Regulatory Compliance/Certifications

# S4-90T-F-V2

---

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## Included Products

- |        |   |                                                                                                                             |
|--------|---|-----------------------------------------------------------------------------------------------------------------------------|
| DB390  | - | Pipe Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Use for narrow panel antennas. Includes two pipe mounts. |
| DB5098 | - | Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members                                                       |

## \* Footnotes

**Performance Note** Severe environmental conditions may degrade optimum performance