


CTX41727Q-DS-43 | E14F10P53



Quad Triplexer 380-960/1695-2200/2300- 2700, DC-sense with 4.3-10 connectors

- BTS-to-feeder and feeder-to-antenna application
- Automatic dc switching with dc sense
- New 4.3-10 connectors for improved PIM performance and size reduction
- DC Load Sense in Feeder-to-Antenna applications
- Convertible mounting brackets
- Stackable in multiples with included hardware

Product Classification

Product Type Triplexer

General Specifications

Product Family CTX41727

Color Gray

Common Port Label COMM

Modularity 4-Quad

Mounting Pole | Wall

Mounting Pipe Hardware Band clamps (2)

RF Connector Interface 4.3-10 Female

RF Connector Interface Body Style Long neck

Dimensions

Height 160 mm | 6.299 in

Width 229 mm | 9.016 in


Depth 165 mm | 6.496 in

Ground Screw Diameter 6 mm | 0.236 in

Mounting Pipe Diameter Range 42.6–122 mm

Outline Drawing

CTX41727Q-DS-43 | E14F10P53

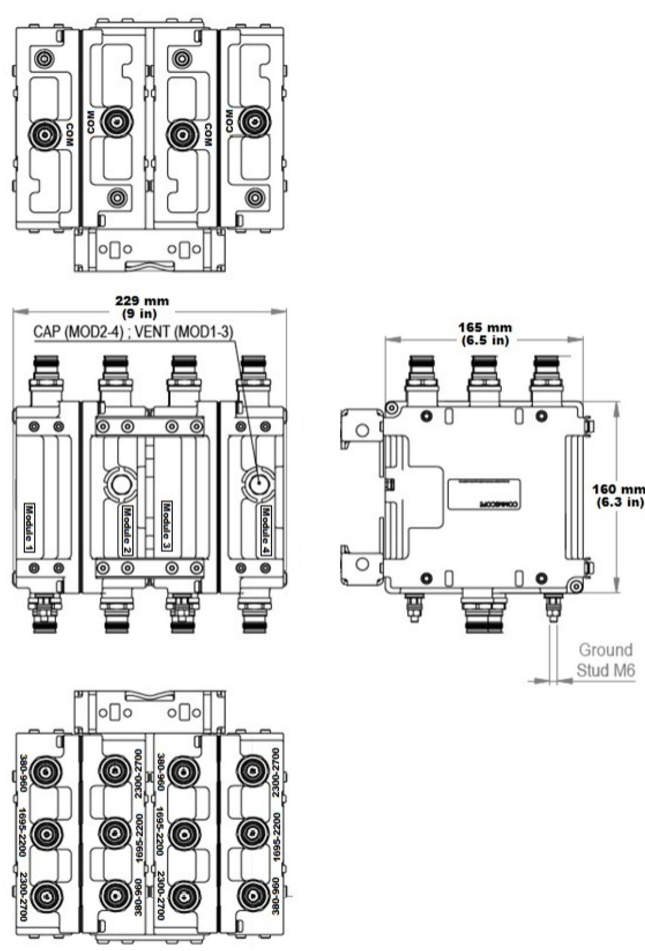

Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	APT 700 AWS 1700 AWS 2000 CEL 850 CEL 900 DCS 1800 EDD 800 IMT 2100 IMT 2600 LMR 750 LMR 800 LMR 900 NMT 450 PCS 1900 TDD 2300 TDD 2600 USA 600 USA 700 USA 750 WCS 2300

Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Auto sensing
dc/AISG Pass-through Path	See logic table
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform
Voltage	7–30 Vdc

CTX41727Q-DS-43 | E14F10P53


Electrical Specifications

Sub-module	1 2 3 4	1 2 3 4	1 2 3 4
Branch	1	2	3
Port Designation	380-960	1695-2200	2300-2700
License Band	APT 700, Band Pass LMR 750, Band Pass LMR 800, Band Pass LMR 900, Band Pass USA 700, Band Pass USA 750, Band Pass USA 600, Band Pass UHF 450, Band Pass CEL 850, Band Pass CEL 900, Band Pass EDD 800, Band Pass	PCS 1900, Band Pass AWS 1700, Band Pass AWS 2000, Band Pass DCS 1800, Band Pass IMT 2100, Band Pass	WCS 2300, Band Pass TDD 2300, Band Pass TDD 2600, Band Pass IMT 2600, Band Pass

Electrical Specifications, Band Pass

Frequency Range, MHz	380–960	1695–2200	2300–2700
Insertion Loss, typical, dB	0.1	0.2	0.2
Total Group Delay, maximum, ns	20	25	25
Return Loss, typical, dB	20	20	20
Isolation, minimum, dB	50	50	50
Input Power, RMS, maximum, W	200	200	200
Input Power, PEP, maximum, W	2000	2000	2000
3rd Order PIM, maximum, dBc	-155	-155	-155
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

Block Diagram

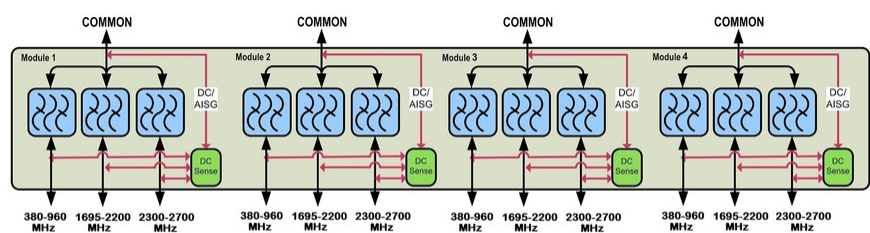

Logic Table

Combining Mode Operation (Bottom)				
PORT 1 380-960	PORT 2 1695-2200	PORT 3 2300-2700	COMMON	
RF Ports Input Voltage			DC/AISG Path Selection	
Any*	Any*	7 ≤ V ≤ 30	<7	380-960 MHz "OFF" 1695-2200 MHz "OFF" 2300-2700MHz "ON"
7 ≤ V ≤ 30	Any*	<7	<7	380-960 MHz "ON" 1695-2200 MHz "OFF" 2300-2700MHz "OFF"
<7	7 ≤ V ≤ 30	<7	<7	380-960 MHz "OFF" 1695-2200 MHz "ON" 2300-2700MHz "OFF"
<7	<7	<7	<7	ALL PORTS OFF

* Any DC voltage applied in the ON (7-30V) or OFF (< 7V) ranges

Note: When two or more DC/AISG are available, port with higher priority is bypassed to common

Splitting Mode Operation (Tower Top)				
RF Ports Impedance DC (Load Sense)				
PORT 1 380-960	PORT 2 1695-2200	PORT 3 2300-2700	COMMON	DC/AISG Path Selection
Short	Short	Short	7 ≤ V ≤ 30	ALL PORTS OFF
Open/ Load	Open/ Load	Open/ Load	7 ≤ V ≤ 30	ALL PORTS ON
One or more port(s) are Open/ Load			7 ≤ V ≤ 30	DC/AISG will be passed to ALL Open/Load port(s)

Note: In this mode DC/AISG will be passed to all detected ports and blocked at shortened ones

DC/AISG PORT Priority

PORT 3 [Highest]
PORT 1
PORT 2 [Lowest]

Mechanical Specifications

Wind Loading @ Velocity, frontal	52.0 N @ 150 km/h (11.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	29.0 N @ 150 km/h (6.5 lbf @ 150 km/h)

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	Up to 100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67

Packaging and Weights

Included	Mounting hardware
Volume	6 L
Weight, without mounting hardware	8.8 kg 19.401 lb