


E14F15P23

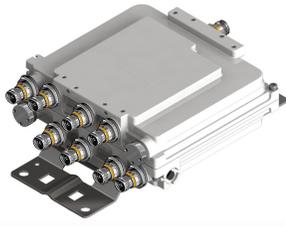

Ultra Compact Twin Quadplexer 1400-1800/2100/2300-2600/3400-3800 MHz, All ports DC bypass, with 4.3-10 connectors

- New Combining Solution to introduce 5G, 3.5GHz band
- Industry leading PIM performance
- Suitable for feeders cables reduction
- New 4.3-10 connectors for improved PIM performance and size reduction
- dc/AISG pass-through on all frequency ports
- Clam shell configuration

Product Classification

Product Type Quadplexer

General Specifications

Color Gray

Modularity 2-Twin

Mounting Pole | Wall

Mounting Pipe Hardware Band clamps (2)

RF Connector Interface 4.3-10 Female

RF Connector Interface Body Style Medium neck

Dimensions

Height 92 mm | 3.622 in





Width 230 mm | 9.055 in

Depth 200 mm | 7.874 in

Mounting Pipe Diameter Range 42.6–122 mm

Outline Drawing

E14F15P23

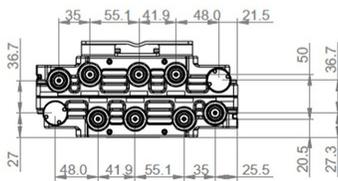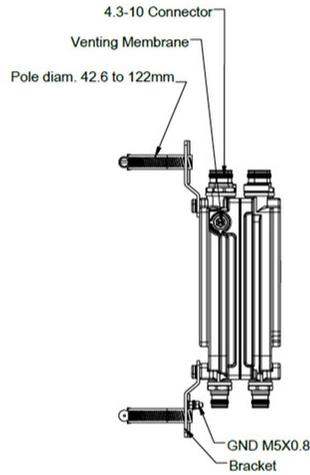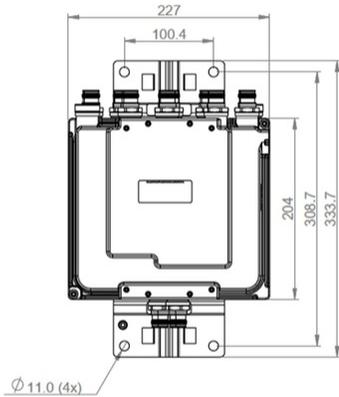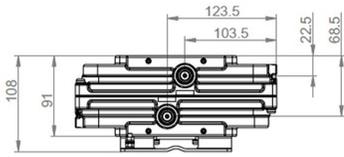

Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	APT 700 CEL 850 CEL 900 DCS 1800 EDD 800 IMT 2100 IMT 2600 LMR 800 LMR 900 SDL 1400 TDD 2300 TDD 2600

Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Factory set
dc/AISG Pass-through Path	Branch 1 Branch 2 Branch 3 Branch 4
dc/AISG Pass-through, combiner	Branch 1 Branch 2 Branch 3 Branch 4
dc/AISG Pass-through, demultiplexer	Branch 1 Branch 2 Branch 3 Branch 4
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform

E14F15P23

Electrical Specifications, AISG

AISG Carrier	2176 KHz ± 100 ppm
Insertion Loss, maximum	0.5 dB
Return Loss, minimum	18 dB


Electrical Specifications

Sub-module	1 2	1 2	1 2	1 2
Branch	1	2	3	4
Port Designation	PORT 1 1350-1880MHz	PORT 2 1920-2170MHz	PORT 3 2300-2690MHz	PORT 4 3400-3800MHz
License Band	SDL 1400, Band Pass DCS 1800, Band Pass	IMT 2100, Band Pass	TDD 2300, Band Pass IMT 2600, Band Pass TDD 2600, Band Pass	TDD 3500, Band Pass

Electrical Specifications, Band Pass

Frequency Range, MHz	1350–1525 1710–1880	1920–2170	2300–2690	3400–3800
Insertion Loss, maximum, dB	0.5	0.5	0.4	0.3
Return Loss, minimum, dB	18	18	18	18
Isolation, minimum, dB	50	50	50	50
Input Power, RMS, maximum, W	100	100	100	100
Input Power, PEP, maximum, W	1000	1000	1000	1000
3rd Order PIM, maximum, dBc	-161	-161	-161	-161
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

Block Diagram

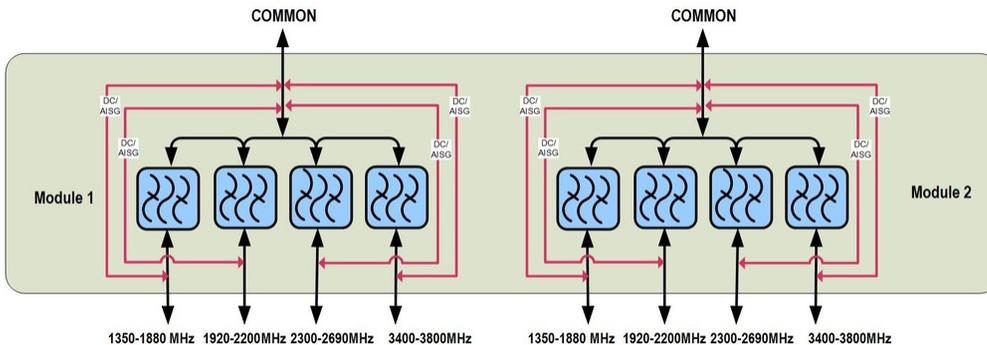

Mechanical Specifications

Wind Speed, maximum	241 km/h (150 mph)
----------------------------	--------------------

E14F15P23

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	15%–100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67
Vibration Test Method	IEC 60068-2-6

Packaging and Weights

Included	Mounting hardware
Volume	4.7 L
Weight, net	5.7 kg 12.566 lb