

# LS2-XMHM-10M-P



LSF2-50 SureFlex® Jumper with interface types NEX10 Male and 4.3-10 Male, 10m

- WARNING: DO NOT MATE WITH 4.1-9.5 DIN

## Product Classification

<b>Product Type</b>	SureFlex® Premium, static PIM
<b>Product Brand</b>	HELIAX®   SureFlex®
<b>Product Series</b>	LSF2-50

## General Specifications

<b>Body Style, Connector A</b>	Straight
<b>Body Style, Connector B</b>	Straight
<b>Interface, Connector A</b>	NEX10 Male
<b>Interface, Connector B</b>	4.3-10 Male
<b>Specification Sheet Revision Level</b>	A

## Dimensions

<b>Length</b>	10 m   32.808 ft
<b>Nominal Size</b>	3/8 in

## Electrical Specifications

<b>3rd Order IMD</b>	-110 dBm
<b>3rd Order IMD Test Method</b>	Two +43 dBm carriers

## VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
698–960 MHz	1.106	25.96
1700–2200 MHz	1.135	23.98
2500–2700 MHz	1.135	23.98
3400–3800 MHz	1.222	20.01

# LS2-XMHM-10M-P

## Jumper Assembly Sample Label



## Environmental Specifications

**Immersion Test Method** Meets IEC 60529:2001, IP68 in mated condition

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- LS2XM-P – NEX10 Male for 3/8 in LSF2-50 cable, factory attached
- LSF2-50 – LSF2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket (Not for Individual Sale - Jumpers only)
- P4HM-S2 – 4.3-10 Male for 3/8 in LSF2-50 cable, factory attached

# LS2XM-P

---



NEX10 Male for 3/8 in LSF2-50 cable, factory attached

## Product Classification

<b>Product Type</b>	Wireless and radiating connector
<b>Product Brand</b>	HELIAX®
<b>Product Series</b>	LSF2-50

## General Specifications


<b>Body Style</b>	Straight
<b>Cable Family</b>	LSF2-50
<b>Inner Contact Attachment Method</b>	Solder
<b>Inner Contact Plating</b>	Silver
<b>Interface</b>	NEX10 Male
<b>Outer Contact Attachment Method</b>	Solder
<b>Outer Contact Plating</b>	Trimetal

## Dimensions

<b>Length</b>	33 mm   1.299 in
<b>Diameter</b>	14.9 mm   0.587 in
<b>Nominal Size</b>	3/8 in

## Outline Drawing

# LS2XM-P

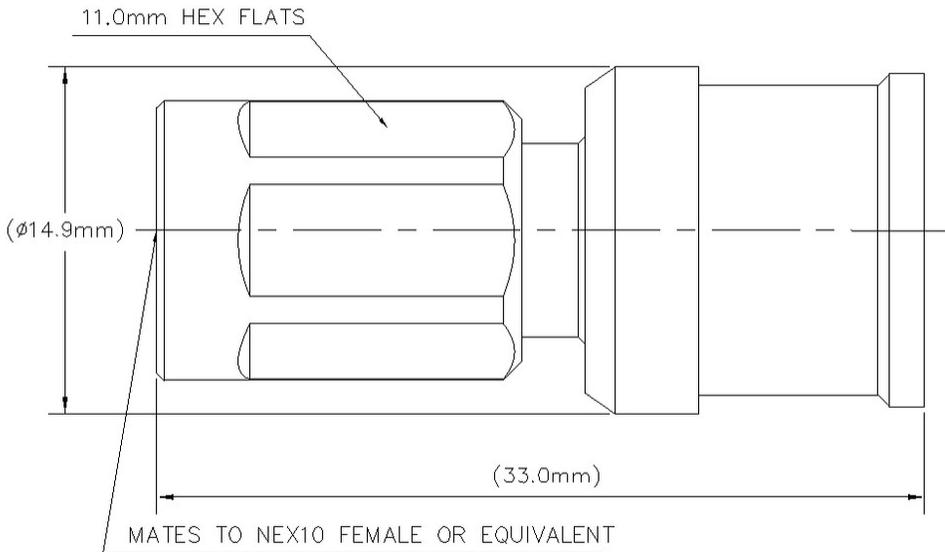

## Electrical Specifications

<b>3rd Order IMD at Frequency</b>	-119 dBm @ 910 MHz
<b>3rd Order IMD Test Method</b>	Two +43 dBm carriers
<b>Insertion Loss Coefficient, typical</b>	0.05
<b>Cable Impedance</b>	50 ohm
<b>Connector Impedance</b>	50 ohm
<b>dc Test Voltage</b>	1500 V
<b>Inner Contact Resistance, maximum</b>	2 mOhm
<b>Insulation Resistance, minimum</b>	5000 MOhm
<b>Operating Frequency Band</b>	0 – 6000 MHz
<b>Outer Contact Resistance, maximum</b>	1 mOhm
<b>Peak Power, maximum</b>	5 kW

## VSWR/Return Loss

<b>Frequency Band</b>	<b>VSWR</b>	<b>Return Loss (dB)</b>
<b>698–970 MHz</b>	1.029	36.9
<b>1700–2700 MHz</b>	1.058	31

# LS2XM-P

---

3000–6000 MHz                      1.222                      20.01

## Mechanical Specifications

<b>Connector Retention Tensile Force</b>	200.17 N   45 lbf
<b>Connector Retention Torque</b>	23.9 in lb   2.7 N-m
<b>Coupling Nut Proof Torque</b>	5 N-m   44.254 in lb
<b>Coupling Nut Retention Force</b>	500 N   112.405 lbf
<b>Interface Durability</b>	100 cycles
<b>Mechanical Shock Test Method</b>	IEC 60068-2-27

## Environmental Specifications

<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-65 °C to +125 °C (-85 °F to +257 °F)
<b>Corrosion Test Method</b>	IEC 60068-2-11
<b>Immersion Depth</b>	1 m
<b>Immersion Test Mating</b>	Mated
<b>Immersion Test Method</b>	IEC 60529:2001, IP68
<b>Moisture Resistance Test Method</b>	IEC 60068-2-3
<b>Thermal Shock Test Method</b>	IEC 60068-2-14
<b>Vibration Test Method</b>	IEC 60068-2-6

## Packaging and Weights

<b>Weight, net</b>	17.61 g   0.039 lb
--------------------	--------------------

## \* Footnotes

<b>Insertion Loss Coefficient, typical</b>	0.05√freq (GHz) (not applicable for elliptical waveguide)
<b>Immersion Depth</b>	Immersion at specified depth for 24 hours

# LSF2-50



LSF2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket (Not for Individual Sale - Jumpers only)

## Product Classification

<b>Product Type</b>	Coaxial wireless cable
<b>Product Brand</b>	HELIAX®   SureFlex®
<b>Product Series</b>	LSF2-50   MLOC
<b>Ordering Note</b>	ANDREW® standard product (Global)

## General Specifications

<b>Flexibility</b>	Superflexible
<b>Jacket Color</b>	Black
<b>Performance Note</b>	Attenuation values typical, guaranteed within 5%

## Dimensions

<b>Diameter Over Dielectric</b>	7.645 mm   0.301 in
<b>Diameter Over Jacket</b>	11.024 mm   0.434 in
<b>Inner Conductor OD</b>	3.048 mm   0.12 in
<b>Outer Conductor OD</b>	9.906 mm   0.39 in
<b>Nominal Size</b>	3/8 in

## Electrical Specifications

<b>Cable Impedance</b>	50 ohm ±1 ohm
<b>Capacitance</b>	80.7 pF/m   24.597 pF/ft
<b>dc Resistance, Inner Conductor</b>	3.65 ohms/km   1.113 ohms/kft
<b>dc Resistance, Outer Conductor</b>	4.64 ohms/km   1.414 ohms/kft
<b>dc Test Voltage</b>	2500 V
<b>Inductance</b>	0.202 µH/m   0.062 µH/ft
<b>Insulation Resistance</b>	100000 MOhms-km
<b>Jacket Spark Test Voltage (rms)</b>	5000 V
<b>Operating Frequency Band</b>	1 – 10200 MHz

# LSF2-50

---

**Peak Power** 15.6 kW

**Velocity** 82 %

## VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
680–800 MHz	1.201	20.79
800–960 MHz	1.201	20.79
1700–2200 MHz	1.201	20.79
2300–2700 MHz	1.201	20.79
3400–3800 MHz	1.201	20.79

## Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)	Average Power (kW)
1.0	0.422	0.129	15.6
1.5	0.501	0.153	15.6
2.0	0.567	0.173	14.27
10.0	1.179	0.359	6.86
20.0	1.641	0.5	4.93
30.0	1.998	0.609	4.05
50.0	2.567	0.782	3.15
85.0	3.342	1.019	2.42
88.0	3.4	1.036	2.38
100.0	3.625	1.105	2.23
108.0	3.768	1.148	2.15
150.0	4.447	1.355	1.82
174.0	4.795	1.461	1.69
200.0	5.147	1.569	1.57
204.0	5.199	1.585	1.56
300.0	6.336	1.931	1.28
400.0	7.351	2.241	1.1
450.0	7.815	2.382	1.03
460.0	7.905	2.409	1.02
500.0	8.257	2.517	0.98
512.0	8.36	2.548	0.97
600.0	9.084	2.769	0.89

# LSF2-50

---

<b>700.0</b>	9.851	3.003	0.82
<b>800.0</b>	10.572	3.222	0.77
<b>824.0</b>	10.739	3.273	0.75
<b>894.0</b>	11.214	3.418	0.72
<b>960.0</b>	11.648	3.55	0.69
<b>1000.0</b>	11.904	3.628	0.68
<b>1218.0</b>	13.231	4.033	0.61
<b>1250.0</b>	13.417	4.089	0.6
<b>1500.0</b>	14.806	4.512	0.55
<b>1700.0</b>	15.848	4.83	0.51
<b>1794.0</b>	16.32	4.974	0.5
<b>1800.0</b>	16.35	4.983	0.49
<b>2000.0</b>	17.321	5.279	0.47
<b>2100.0</b>	17.791	5.423	0.45
<b>2200.0</b>	18.253	5.563	0.44
<b>2300.0</b>	18.706	5.701	0.43
<b>2500.0</b>	19.589	5.97	0.41
<b>2700.0</b>	20.445	6.231	0.4
<b>3000.0</b>	21.682	6.608	0.37
<b>3400.0</b>	23.26	7.089	0.35
<b>3600.0</b>	24.022	7.321	0.34
<b>3700.0</b>	24.396	7.436	0.33
<b>3800.0</b>	24.767	7.549	0.33
<b>3900.0</b>	25.134	7.661	0.32
<b>4000.0</b>	25.498	7.771	0.32
<b>4100.0</b>	25.858	7.881	0.31
<b>4200.0</b>	26.215	7.99	0.31
<b>4300.0</b>	26.569	8.098	0.3
<b>4400.0</b>	26.92	8.205	0.3
<b>4500.0</b>	27.267	8.311	0.3
<b>4600.0</b>	27.612	8.416	0.29
<b>4700.0</b>	27.954	8.52	0.29
<b>4800.0</b>	28.294	8.623	0.29
<b>4900.0</b>	28.63	8.726	0.28
<b>5000.0</b>	28.965	8.828	0.28

# LSF2-50

<b>6000.0</b>	32.183	9.809	0.25
<b>8000.0</b>	38.096	11.611	0.21
<b>8800.0</b>	40.314	12.287	0.2
<b>10000.0</b>	43.516	13.263	0.19

## Material Specifications

<b>Dielectric Material</b>	Foam PE
<b>Jacket Material</b>	PE
<b>Inner Conductor Material</b>	Copper-clad aluminum wire
<b>Outer Conductor Material</b>	Corrugated copper

## Mechanical Specifications

<b>Minimum Bend Radius, multiple Bends</b>	25.4 mm   1 in
<b>Minimum Bend Radius, single Bend</b>	25.4 mm   1 in
<b>Number of Bends, minimum</b>	15
<b>Tensile Strength</b>	118 kg   260.145 lb
<b>Bending Moment</b>	2.2 N-m   19.472 in lb
<b>Flat Plate Crush Strength</b>	2 kg/mm   111.995 lb/in

## Environmental Specifications

<b>Installation temperature</b>	-40 °C to +60 °C (-40 °F to +140 °F)
<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-70 °C to +85 °C (-94 °F to +185 °F)
<b>Attenuation, Ambient Temperature</b>	68 °F   20 °C
<b>Average Power, Ambient Temperature</b>	104 °F   40 °C
<b>Average Power, Inner Conductor Temperature</b>	212 °F   100 °C
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Fca

## Packaging and Weights

<b>Cable weight</b>	0.11 kg/m   0.074 lb/ft
---------------------	-------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

# LSF2-50

---



# P4HM-S2

---



4.3-10 Male for 3/8 in LSF2-50 cable, factory attached

## Product Classification

<b>Product Type</b>	Wireless and radiating connector
<b>Product Brand</b>	HELIAX®

## General Specifications


<b>Body Style</b>	Straight
<b>Cable Family</b>	LSF2-50
<b>Inner Contact Attachment Method</b>	Solder
<b>Inner Contact Plating</b>	Silver
<b>Interface</b>	4.3-10 Male
<b>Outer Contact Attachment Method</b>	Solder
<b>Outer Contact Plating</b>	Trimetal

## Dimensions

<b>Length</b>	20.07 mm   0.79 in
<b>Diameter</b>	23.88 mm   0.94 in
<b>Nominal Size</b>	3/8 in

## Outline Drawing

# P4HM-S2

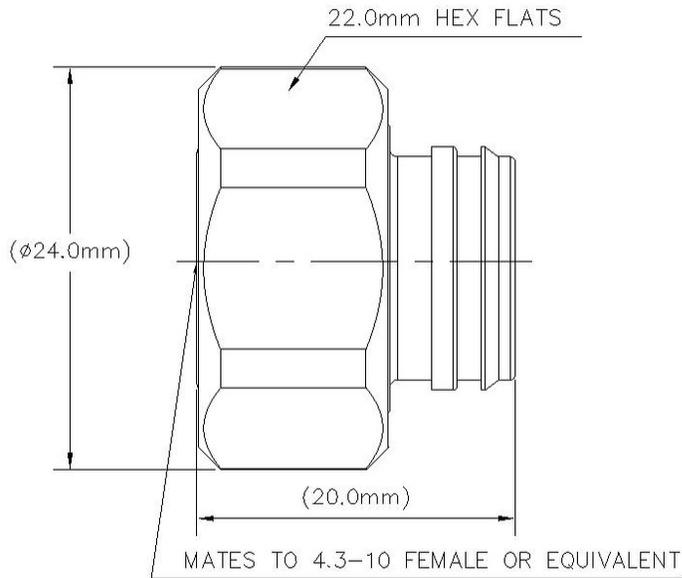

## Electrical Specifications

<b>3rd Order IMD at Frequency</b>	-119 dBm @ 910 MHz
<b>3rd Order IMD Test Method</b>	Two +43 dBm carriers
<b>Insertion Loss Coefficient, typical</b>	0.05
<b>Cable Impedance</b>	50 ohm
<b>Connector Impedance</b>	50 ohm
<b>dc Test Voltage</b>	2500 V
<b>Inner Contact Resistance, maximum</b>	1 mOhm
<b>Insulation Resistance, minimum</b>	5000 MOhm
<b>Operating Frequency Band</b>	0 – 6000 MHz
<b>Outer Contact Resistance, maximum</b>	1 mOhm
<b>Peak Power, maximum</b>	15 kW

## VSWR/Return Loss

Frequency Band	VSWR	Return Loss (dB)
0–3.8 GHz	1.023	38.89
3.8–6 GHz	1.041	33.94

# P4HM-S2

---

## Mechanical Specifications

<b>Connector Retention Tensile Force</b>	200.17 N   45 lbf
<b>Connector Retention Torque</b>	2.7 N-m   23.897 in lb
<b>Coupling Nut Proof Torque</b>	8 N-m   70.806 in lb
<b>Coupling Nut Retention Force</b>	449.98 N   101.16 lbf
<b>Interface Durability</b>	100 cycles
<b>Mechanical Shock Test Method</b>	IEC 60068-2-27

## Environmental Specifications

<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-65 °C to +125 °C (-85 °F to +257 °F)
<b>Attenuation, Ambient Temperature</b>	20 °C   68 °F
<b>Average Power, Ambient Temperature</b>	40 °C   104 °F
<b>Corrosion Test Method</b>	IEC 60068-2-11
<b>Immersion Depth</b>	1 m
<b>Immersion Test Mating</b>	Mated
<b>Immersion Test Method</b>	IEC 60529:2001, IP68
<b>Moisture Resistance Test Method</b>	IEC 60068-2-3
<b>Thermal Shock Test Method</b>	IEC 60068-2-14
<b>Vibration Test Method</b>	IEC 60068-2-6

## Packaging and Weights

<b>Weight, net</b>	25.45 g   0.056 lb
--------------------	--------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



# P4HM-S2

---

## \* Footnotes

**Insertion Loss Coefficient, typical**  $0.05\sqrt{\text{freq}} \text{ (GHz)}$  (not applicable for elliptical waveguide)

**Immersion Depth** Immersion at specified depth for 24 hours