

HFT206-4SNOK7



HELIAX® Hybrid Jumper Cable Assembly. RRU end; 4 fibers LC Duplex with AOPE OCTIS weather shrouds, 2 x 6AWG DC conductors with 55A power connector installed. Enclosure end; 4 fibers LC Duplex and 2 x 6AWG conductors terminated in IP25 connector

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Hybrid cable assembly
Product Brand	HELIAX®
Product Series	HFT
Ordering Note	ANDREW® non-standard product

General Specifications


Conductors, quantity	2
Construction Type	Hybrid standard tail
Interface, Connector A	DLC
Interface Feature, connector A	Outdoor
Interface Body Style, connector A	Straight
Interface, Connector B	IP-LC
Interface Feature, connector B	Outdoor
Interface Body Style, connector B	Straight
Jacket Color	Black
Total Fibers, quantity	4

Dimensions

Cable Assembly Length Range (ft)	15 – 200
Diameter Over Jacket	17.06 mm 0.672 in
Center Conductor Gauge	6 AWG

Ordering Tree

HFT206-4SNOK7

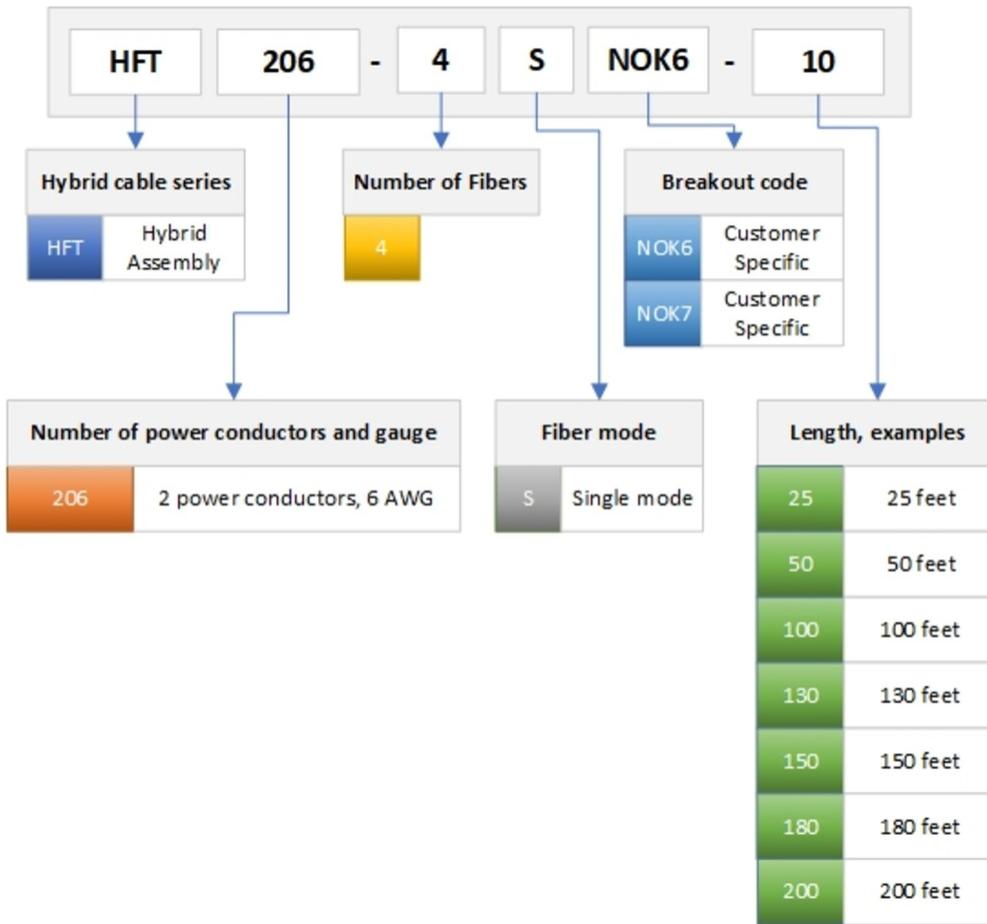

Mechanical Specifications

Minimum Bend Radius 170.6 mm | 6.717 in

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2

Insertion Loss, typical note Insertion loss is measured at 1310 and 1550 nm

Insertion Loss, typical 0.65 dB

Environmental Specifications

Operating Temperature -40 °C to +75 °C (-40 °F to +167 °F)

Packaging and Weights

HFT206-4SNOK7

Cable weight

0.5 kg/m | 0.336 lb/ft

Regulatory Compliance/Certifications

Agency**Classification**

CHINA-ROHS

Below maximum concentration value

REACH-SVHC

Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS

Compliant

UK-ROHS

Compliant



* Footnotes

Insertion Loss, typical note Insertion loss is measured at a room temp of +20°C (+68°F)