

HFT410-4SNOK4



HELIAX® Hybrid Cable Assembly. HQLC End 1: 4 fibers DLC for Nokia AirScale RRUs, R2CT with power connector pre-installed. End 2: 4 fibers terminated LC and 4 X 10 AWG conductors terminated at hybrid trunk connector

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Hybrid cable assembly
Product Brand	HELIAX®
Product Series	HFT
Ordering Note	ANDREW® non-standard product

General Specifications


Conductors, quantity	4
Construction Type	Hybrid standard tail
Interface, Connector A	DLC
Interface Feature, connector A	Uniboot
Interface Body Style, connector A	Straight
Interface, Connector B	HQ-LC
Interface Feature, connector B	Outdoor
Interface Body Style, connector B	Straight
Jacket Color	Black
Total Fibers, quantity	4

Dimensions

Cable Assembly Length Range (ft)	6 – 300
Diameter Over Jacket	18.31 mm 0.721 in
Center Conductor Gauge	10 AWG

Ordering Tree

HFT410-4SNOK4

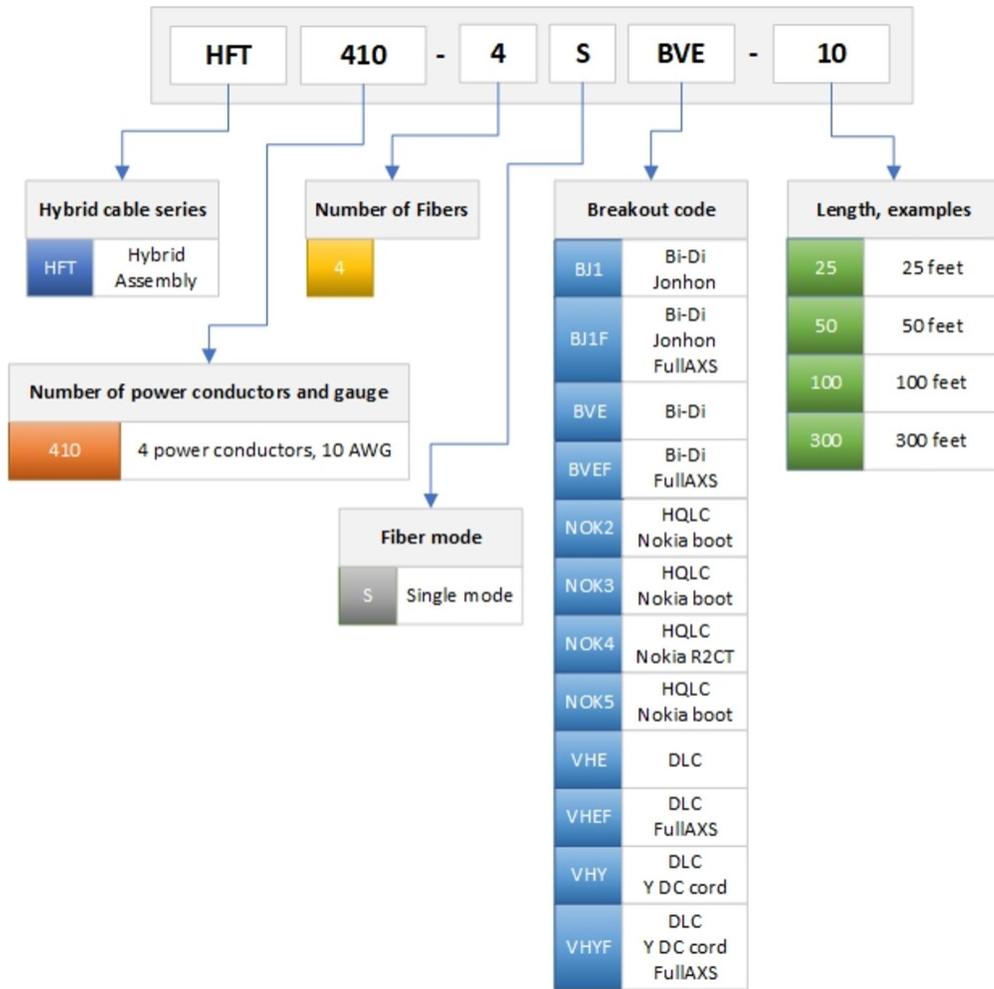

Mechanical Specifications

Minimum Bend Radius 221 mm | 8.701 in

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2

Insertion Loss, typical note Insertion loss is measured at 1310 and 1550 nm

Insertion Loss, typical 0.75

Environmental Specifications

Operating Temperature -40 °C to +75 °C (-40 °F to +167 °F)

HFT410-4SNOK4

Packaging and Weights

Cable weight 0.5 kg/m | 0.336 lb/ft

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Insertion Loss, typical note Insertion loss is measured at a room temp of +20°C (+68°F)