

L2-PSMSM-HF

Base Product



LDF2-50 Jumper with interface types SMA Male and SMA Male, variable length

Product Classification

| | |
|-----------------------|--------------------------------------|
| Product Type | Wireless transmission cable assembly |
| Product Series | LDF2-50 |

General Specifications

| | |
|---|--|
| Body Style, Connector A | Straight |
| Body Style, Connector B | Straight |
| Interface, Connector A | SMA Male |
| Interface, Connector B | SMA Male |
| Specification Sheet Revision Level | A |
| Variable Length | For custom lengths, contact your local ANDREW representative |

Dimensions

| | |
|---------------------|--------|
| Nominal Size | 3/8 in |
|---------------------|--------|

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------|-------|------------------|
| 45–13000 MHz | 1.577 | 13 |

Jumper Assembly Sample Label

L2-PSMSM-HF



Environmental Specifications

Immersion Test Method

Meets IEC 60529:2001, IP68 in mated condition

Included Products

- L2TSM-PL – SMA Male Positive Lock for 3/8 in LDF2-50 cable
- LDF2-50 – LDF2-50, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket

L2TSM-PL

SMA Male Positive Lock for 3/8 in LDF2-50 cable



Product Classification

| | |
|-----------------------|----------------------------------|
| Product Type | Wireless and radiating connector |
| Product Brand | HELIAX® |
| Product Series | LDF2-50 |

General Specifications


| | |
|--|------------|
| Body Style | Straight |
| Cable Family | LDF2-50 |
| Inner Contact Attachment Method | Captivated |
| Inner Contact Plating | Gold |
| Interface | SMA Male |
| Mounting Angle | Straight |
| Outer Contact Attachment Method | Ring-flare |
| Outer Contact Plating | Trimetal |
| Pressurizable | No |

Dimensions

| | |
|---------------------|--------------------|
| Height | 16.26 mm 0.64 in |
| Width | 16.26 mm 0.64 in |
| Length | 44.7 mm 1.76 in |
| Diameter | 16.26 mm 0.64 in |
| Nominal Size | 3/8 in |

Outline Drawing

L2TSM-PL

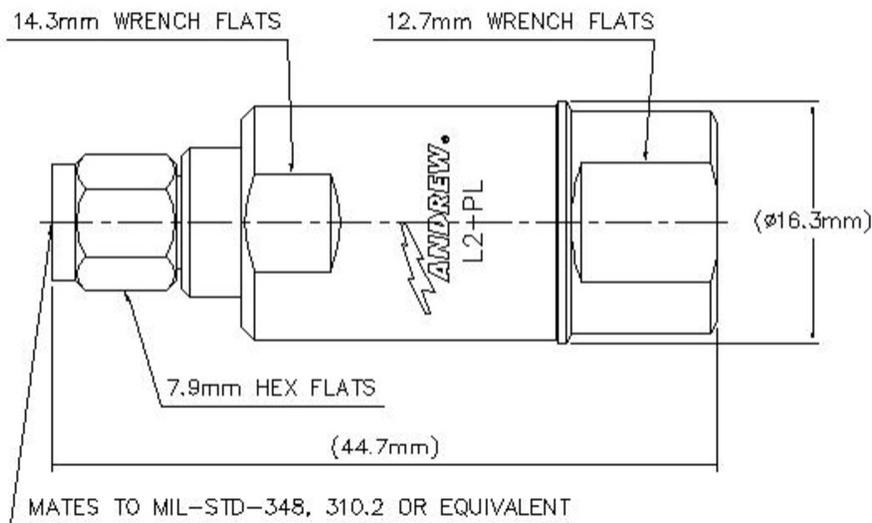

Electrical Specifications

| | |
|---|------------------|
| Insertion Loss Coefficient, typical | 0.05 |
| Average Power at Frequency | 0.7 kW @ 900 MHz |
| Cable Impedance | 50 ohm |
| Connector Impedance | 50 ohm |
| dc Test Voltage | 1000 V |
| Inner Contact Resistance, maximum | 3 mOhm |
| Insulation Resistance, minimum | 5000 MOhm |
| Operating Frequency Band | 0 – 13500 MHz |
| Outer Contact Resistance, maximum | 2.5 mOhm |
| Peak Power, maximum | 5 kW |
| RF Operating Voltage, maximum (vrms) | 500 V |
| Shielding Effectiveness | -110 dB |

VSWR/Return Loss

| Frequency Band | VSWR | Return Loss (dB) |
|----------------------|-------|------------------|
| 0–960 MHz | 1.02 | 40.09 |
| 960–2200 MHz | 1.052 | 31.92 |
| 2200–2700 MHz | 1.058 | 31 |

L2TSM-PL

| | | |
|-----------------|-------|-------|
| 2700–4000 MHz | 1.065 | 30.04 |
| 4000–6000 MHz | 1.065 | 30.04 |
| 6000–8000 MHz | 1.052 | 31.92 |
| 8000–10000 MHz | 1.058 | 31 |
| 10000–12000 MHz | 1.119 | 25.01 |
| 12000–13500 MHz | 1.222 | 20.01 |

Mechanical Specifications

| | |
|--|---------------------------|
| Attachment Durability | 25 cycles |
| Connector Retention Tensile Force | 671.68 N 151 lbf |
| Connector Retention Torque | 2.7 N-m 23.897 in lb |
| Coupling Nut Proof Torque | 1.7 N-m 15.046 in lb |
| Coupling Nut Retention Force | 266.98 N 60.02 lbf |
| Coupling Nut Retention Force Method | MIL-C-39012C-3.25, 4.6.22 |
| Insertion Force | 22.02 N 4.95 lbf |
| Insertion Force Method | IEC 61169-1:15.2.4 |
| Interface Durability | 500 cycles |
| Interface Durability Method | IEC 61169-15:9.5 |
| Mechanical Shock Test Method | IEC 60068-2-27 |

Environmental Specifications

| | |
|---|---------------------------------------|
| Operating Temperature | -55 °C to +85 °C (-67 °F to +185 °F) |
| Storage Temperature | -65 °C to +125 °C (-85 °F to +257 °F) |
| Attenuation, Ambient Temperature | 20 °C 68 °F |
| Average Power, Ambient Temperature | 40 °C 104 °F |
| Average Power, Inner Conductor Temperature | 100 °C 212 °F |
| Corrosion Test Method | IEC 60068-2-11 |
| Immersion Depth | 1 m |
| Immersion Test Mating | Mated |
| Immersion Test Method | IEC 60529:2001, IP68 |
| Moisture Resistance Test Method | IEC 60068-2-3 |
| Thermal Shock Test Method | IEC 60068-2-14 |
| Vibration Test Method | IEC 60068-2-6 |

L2TSM-PL

Packaging and Weights

Weight, net

29.43 g | 0.065 lb

Regulatory Compliance/Certifications

Agency

Classification

CHINA-ROHS

Below maximum concentration value

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

REACH-SVHC

Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS

Compliant

UK-ROHS

Compliant



* Footnotes

Insertion Loss Coefficient, typical $0.05\sqrt{\text{freq (GHz)}}$ (not applicable for elliptical waveguide)

Immersion Depth Immersion at specified depth for 24 hours

LDF2-50



LDF2-50, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket

Product Classification

| | |
|-----------------------|------------------------|
| Product Type | Coaxial wireless cable |
| Product Brand | HELIAX® SureFlex® |
| Product Series | LDF2-50 |

General Specifications

| | |
|-------------------------|--|
| Product Number | 520098202/00 SZ520098202/00 |
| Flexibility | Standard |
| Jacket Color | Black |
| Performance Note | Attenuation values typical, guaranteed within 5% |

Dimensions

| | |
|---------------------------------|---------------------|
| Diameter Over Dielectric | 8.636 mm 0.34 in |
| Diameter Over Jacket | 11.176 mm 0.44 in |
| Inner Conductor OD | 3.124 mm 0.123 in |
| Outer Conductor OD | 9.652 mm 0.38 in |
| Nominal Size | 3/8 in |

Electrical Specifications

| | |
|--|-----------------------------------|
| Cable Impedance | 50 ohm \pm 1 ohm |
| Capacitance | 75.5 pF/m 23.012 pF/ft |
| dc Resistance, Inner Conductor | 3.478 ohms/km 1.06 ohms/kft |
| dc Resistance, Outer Conductor | 2.854 ohms/km 0.87 ohms/kft |
| dc Test Voltage | 2500 V |
| Inductance | 0.19 μ H/m 0.058 μ H/ft |
| Insulation Resistance | 100000 MOhms-km |
| Jacket Spark Test Voltage (rms) | 5000 V |
| Operating Frequency Band | 1 – 13000 MHz |

LDF2-50

| | |
|-------------------|---------|
| Peak Power | 15.6 kW |
| Velocity | 85 % |

Material Specifications

| | |
|---------------------------------|---------------------------|
| Dielectric Material | Foam PE |
| Jacket Material | PE |
| Inner Conductor Material | Copper-clad aluminum wire |
| Outer Conductor Material | Corrugated copper |

Mechanical Specifications

| | |
|--|-------------------------|
| Minimum Bend Radius, multiple Bends | 95.25 mm 3.75 in |
| Minimum Bend Radius, single Bend | 40.64 mm 1.6 in |
| Number of Bends, minimum | 15 |
| Number of Bends, typical | 50 |
| Tensile Strength | 113 kg 249.122 lb |
| Bending Moment | 1.9 N-m 16.816 in lb |
| Flat Plate Crush Strength | 2 kg/mm 111.995 lb/in |

Environmental Specifications

| | |
|---|--------------------------------------|
| Installation temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Operating Temperature | -55 °C to +85 °C (-67 °F to +185 °F) |
| Storage Temperature | -70 °C to +85 °C (-94 °F to +185 °F) |
| Attenuation, Ambient Temperature | 68 °F 20 °C |
| Average Power, Ambient Temperature | 104 °F 40 °C |
| Average Power, Inner Conductor Temperature | 212 °F 100 °C |

Packaging and Weights

| | |
|---------------------|-------------------------|
| Cable weight | 0.12 kg/m 0.081 lb/ft |
|---------------------|-------------------------|

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.andrew.com/ProductCompliance |

LDF2-50

ROHS Compliant

UK-ROHS Compliant

