

HFT206-6SNC25



HELIAX® Hybrid Cable Assembly. End 1: six fibers within three DLC with AOPC shroud and one pair 6AWG power cord with connector installed. End two: Y- split with two IP-25 hybrid connectors.

Product Classification

| | |
|------------------------------|---|
| Regional Availability | Asia Australia/New Zealand EMEA Latin America North America |
| Product Type | Hybrid cable assembly |
| Product Brand | HELIAX® |
| Product Series | HFT |
| Ordering Note | ANDREW® non-standard product |

General Specifications


| | |
|--|----------------------|
| Conductors, quantity | 2 |
| Construction Type | Hybrid standard tail |
| Interface, Connector A | DLC |
| Interface Feature, connector A | Outdoor |
| Interface Body Style, connector A | Straight |
| Interface, Connector B | DLC |
| Interface Feature, connector B | IP25 |
| Interface Body Style, connector B | Straight |
| Jacket Color | Black |
| Total Fibers, quantity | 6 |

Dimensions

| | |
|---|---------------------|
| Cable Assembly Length Range (ft) | 15 – 150 |
| Diameter Over Jacket | 24.42 mm 0.961 in |
| Center Conductor Gauge | 6 AWG |

Ordering Tree

HFT206-6SNC25 - 10

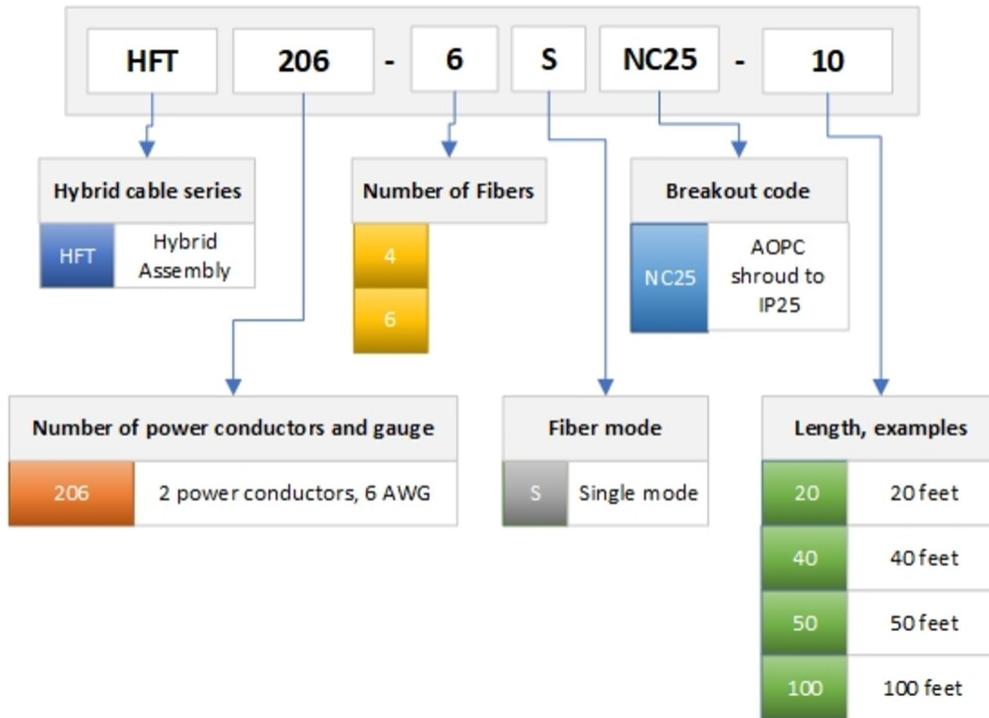

Mechanical Specifications

Minimum Bend Radius 292.1 mm | 11.5 in

Optical Specifications

Fiber Type G.657.A2

Insertion Loss, typical note Insertion loss is measured at 1310 and 1550 nm

Insertion Loss, typical 0.75

Environmental Specifications

Operating Temperature -40 °C to +75 °C (-40 °F to +167 °F)

Packaging and Weights

Cable weight 0.7 kg/m | 0.47 lb/ft

* Footnotes

Insertion Loss, typical note Insertion loss is measured at a room temp of +20°C (+68°F)