

NOTES:

1.0 GENERAL NOTES

- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 MARK PART WITH IDENTIFICATION NUMBER
- 1.3 FOR PATENT INFO: <https://www.cs-pat.com>

2.0 DESIGN NOTES

- 2.1 DESIGN SURVIVAL WIND SPEED: 150 MPH, 3 SEC GUST WITH EQUIPMENT MOUNTED AS SHOWN

3.0 MANUFACTURING/SPECIAL REQUIREMENTS

3.1 TORQUE HARDWARE ACCORDING TO SIZE AS NOTED BELOW


- ALL HARDWARE 1/4" DIAMETER: TORQUE 7 FT-LBS
- ALL HARDWARE 3/8" DIAMETER: TORQUE 12 FT-LBS
- ALL HARDWARE 1/2" DIAMETER OR LARGER SHALL BE TIGHTENED SNUG TIGHT, DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN IRONWORKER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED PLIES INTO FIRM CONTACT.

4.0 TEST

5.0 PACKAGING

- 5.1 PACKAGING SHALL MEET COMMSCOPE REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAYBE SUPPLIED, BAGGED AND SHIPPED

REVISIONS				
REV.	ECN	DESCRIPTION	BY	DATE
A	13539	INITIAL RELEASE	YMENG	07/08/2021

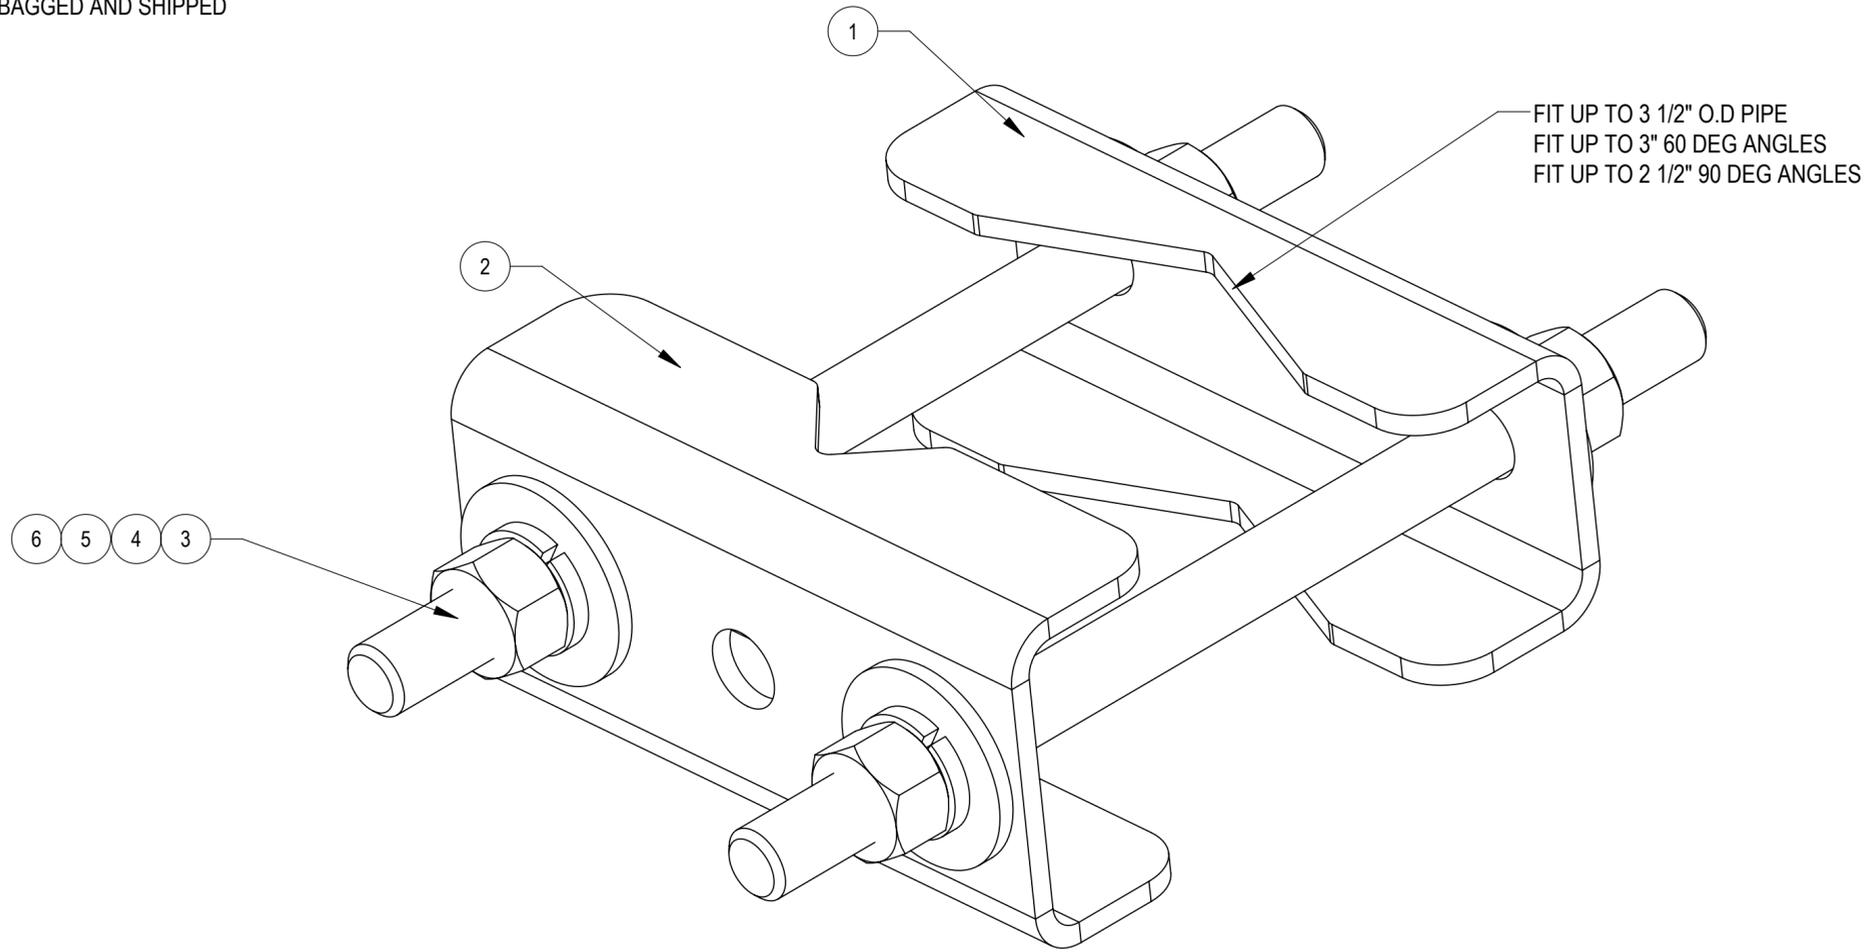

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	BP51875-625	CLAMP, UNIVERSAL BACK	1
2	BP56875-625	CLAMP, UNIVERSAL FRONT	1
3	MT-381-10	5/8" X 10" GALV THREADED ROD	2
4	GWF-05	5/8" GALV FLAT WASHER, 1.7OD	4
5	GWL-05	5/8" GALV LOCK WASHER	4
6	GN-05	5/8" GALV HEX NUT	4

DENSITY		lbs/in ³
MASS	5.79	lbs
VOLUME	20.44	in ³
SURFACE AREA	218.51	in ²
HEIGHT		
LENGTH		
WIDTH		

COMMSCOPE, INC. OF NORTH CAROLINA										
TOLERANCES					SAP MATERIAL MASTER					
0 PLACE X ± .25		2 PLACE .XX ± 0.06			VZWSMART-MSK9					
1 PLACE .X ± 0.12		ANGLES ± 2°								
FINISH GALV A123					MATERIAL A1011/A1018 GR 3					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994	CE	YMENG	07/08/2021	UNIVERSAL LEG CLAMP						
	RW	YMENG	07/14/2021							
	AD	BCAMPBELLCON	07/20/2021							
	RE	HDAI	07/21/2021							
	ECN	13539PC								
SCALE	1:2			DOCUMENT NO. VZWSMART-MSK9						
SIZE	Auth Group	INSL	MODEL			DRAWING				SHEET 1 OF 1
C			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION		
			00	RE	A	00	RE	A		