



**For Braided Cable CNT-300
TNC Male, Captivated Pin,
Clamp-type Body: 300PTM-C**

Bulletin 7559381 Revision B Page 1 of 1

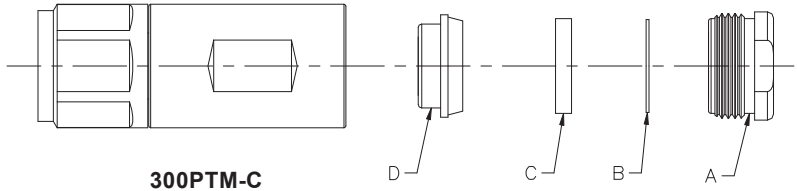


300PTM-C


1 Remove 6.5 mm (0.256") of Jacket only.




2 Slide parts A, B, C onto the cable.
Note: the direction of part C as shown.




3 Comb braid straight with a wire brush.

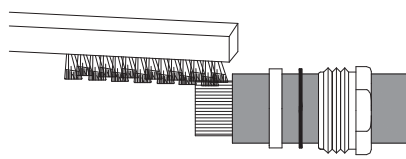


4 Install part D as shown without damaging the braid.




5 Fold braid around part D and comb braid as shown, the braid should be straight and equally spaced after comb.




6 Cut off the redundant braid as shown.

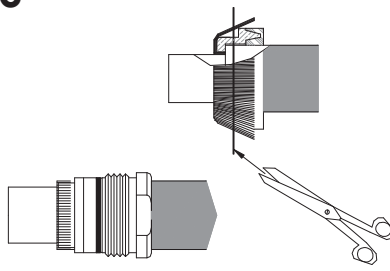


7 Remove 5.0 mm (0.197") of foam.
Remove all foam/glue residue from the center conductor.

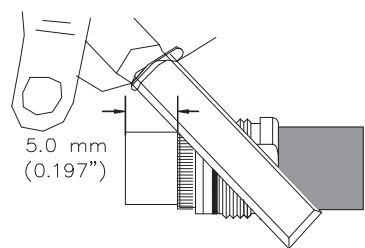

8 Chamfer the center conductor at a 45° angle.

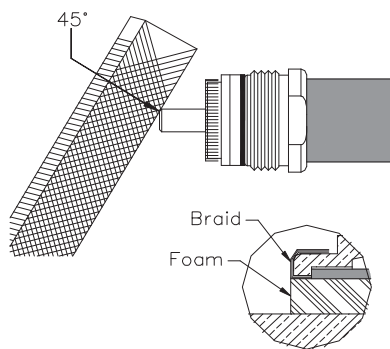

9 The cable attachment must be straight and aligned with the hole of connector inner contact. Insert cable attachment into connector body until stopped; the center conductor must be inserted into the connector inner contact fingers. Tighten the connection to the torque value of 60-80 lb-in (6.8-9.0 Nm).
Note: Do not turn connector body, turn cable attachment.
The V type part C are splitted into two pieces after part A installation.

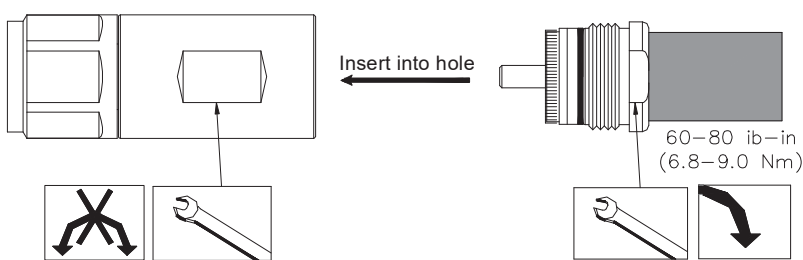

	表一 有毒有害物质或元素名称及含量标识格式					
	有毒有害物质或元素					
部件名称 (Part Name)	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
连接器 (Connector)	X	O	O	O	O	O
O: 表示有毒有害物质在该部件所有的均质材料中的含量均在SJ/T 11363-2006规定的限量要求以下。 X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006规定的限量要求。						

ANDREW an Amphenol company
2601 Telecom Parkway, Richardson, Texas, 75082, USA
www.andrew.com

Technical Support
+1 888 297 6433, Option 3 (Toll Free US and Canada)
awpnarsupport@andrew.com

Notice: ANDREW disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.
 Aviso: ANDREW no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.
 Avis: ANDREW décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.
 Hinweis: ANDREW lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.
 Atenção: A ANDREW abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.
 Avvertenza: ANDREW declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.
 注意: ANDREW 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負責任。何義務和責任。

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.

Inches
4
3
2
1
100
90
80
70
60
50
40
30
20
Millimeters