

RRV4-65B-R6H4VB-V2



12-port sector antenna, 4x 694–960 and 8x 1695–2690 MHz, 65° HPBW, 6x RET.

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Array configuration provides capability for 4T4R (4x MIMO) on Low band and Dual 4T4R (4x MIMO) on High band
- Non-stacked high band array design provides higher gain and narrower vertical beamwidth than traditional antenna designs

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Aluminum
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	1 female 1 male
Input Voltage	10–30 Vdc
Internal RET	Low band (2) Mid band (4)
Power Consumption, active state, maximum	10 W
Power Consumption, idle state, maximum	2 W


RRV4-65B-R6H4VB-V2

Protocol 3GPP/AISG 2.0 (Single RET)

Dimensions

Width 499 mm | 19.646 in
Depth 199 mm | 7.835 in
Length 2100 mm | 82.677 in
Net Weight, antenna only 37.1 kg | 81.791 lb

Array Layout

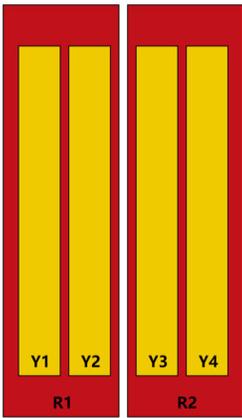

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxxxxxR1
R2	694-960	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxxxxxR2
Y1	1695-2690	5 - 6	65°	3	AISG1	CPxxxxxxxxxxxxxxxxY1
Y2	1695-2690	7 - 8	65°	4	AISG1	CPxxxxxxxxxxxxxxxxY2
Y3	1695-2690	9 - 10	65°	5	AISG1	CPxxxxxxxxxxxxxxxxY3
Y4	1695-2690	11 - 12	65°	6	AISG1	CPxxxxxxxxxxxxxxxxY4

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



Electrical Specifications

Impedance 50 ohm
Operating Frequency Band 1695 – 2690 MHz | 694 – 960 MHz

RRV4-65B-R6H4VB-V2

Polarization	±45°
Total Input Power, maximum	1,000 W

Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y1-Y4	Y1-Y4	Y1-Y4	Y1-Y4	Y1-Y4
Frequency Band, MHz	694–806	790–890	880–960	1695–1880	1850–1990	1920–2200	2300–2400	2500–2690
RF Port	1-4	1-4	1-4	5-12	5-12	5-12	5-12	5-12
Gain, dBi	15.7	16.1	16.3	16.9	17.1	17.2	17.6	18
Beamwidth, Horizontal, degrees	65	67	68	70	67	68	62	57
Beamwidth, Vertical, degrees	9.8	8.7	8	6.6	6.3	5.9	5.3	4.8
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	19	18	17	15	17	19	21	19
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	27	29	29	26	27	27	27	27
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port, maximum, watts	250	250	250	200	200	200	200	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	608.0 N @ 150 km/h (136.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	291.0 N @ 150 km/h (65.4 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	1,078.0 N @ 150 km/h (242.3 lbf @ 150 km/h)
Wind Speed, maximum	200 km/h (124 mph)

Packaging and Weights

Width, packed	570 mm 22.441 in
Depth, packed	275 mm 10.827 in
Length, packed	2375 mm 93.504 in
Weight, gross	48.4 kg 106.704 lb

Regulatory Compliance/Certifications

RRV4-65B-R6H4VB-V2

Agency

CHINA-ROHS

ISO 9001:2015

ROHS

UK-ROHS

Classification

Above maximum concentration value

Designed, manufactured and/or distributed under this quality management system

Compliant/Exempted

Compliant/Exempted



Included Products

- BSAMNT-B92-08 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance