

# R-65B-R1VB



2-port sector antenna, 2x 694–960 MHz, 65° HPBW, 1x RET.

- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Single band
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	0
<b>RF Connector Quantity, mid band</b>	0
<b>RF Connector Quantity, low band</b>	2
<b>RF Connector Quantity, total</b>	2

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	1 female   1 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	Low band (1)
<b>Power Consumption, active state, maximum</b>	10 W
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)


# R-65B-R1VB

---

## Dimensions

<b>Width</b>	320 mm   12.598 in
<b>Depth</b>	140 mm   5.512 in
<b>Length</b>	2008 mm   79.055 in
<b>Net Weight, antenna only</b>	19.3 kg   42.549 lb

## Array Layout

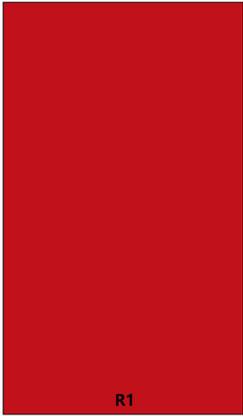

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxR1

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# R-65B-R1VB



## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	694 – 960 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	500 W

## Electrical Specifications

	<b>R1</b>	<b>R1</b>	<b>R1</b>
<b>Frequency Band, MHz</b>	<b>698–806</b>	<b>790–894</b>	<b>890–960</b>
<b>RF Port</b>	1,2	1,2	1,2
<b>Gain, dBi</b>	15.9	16.4	16.8
<b>Beamwidth, Horizontal, degrees</b>	69	66	63
<b>Beamwidth, Vertical, degrees</b>	11.5	10.2	9.4
<b>Beam Tilt, degrees</b>	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	22	21	17
<b>Front-to-Back Ratio, Copolarization 180° ± 30°, dB</b>	29	29	28
<b>Isolation, Cross Polarization, dB</b>	28	28	28

# R-65B-R1VB

---

<b>VSWR   Return loss, dB</b>	1.5   14.0	1.5   14.0	1.5   14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153
<b>Input Power per Port, maximum, watts</b>	300	300	300

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	325.0 N @ 150 km/h (73.1 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	295.0 N @ 150 km/h (66.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	711.0 N @ 150 km/h (159.8 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	415 mm   16.339 in
<b>Depth, packed</b>	235 mm   9.252 in
<b>Length, packed</b>	2285 mm   89.961 in
<b>Weight, gross</b>	29 kg   63.934 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

<b>Performance Note</b>	Severe environmental conditions may degrade optimum performance
-------------------------	---